









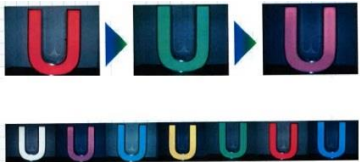

	20w タイプ	40w タイプ	110w タイプ
品 番	UEC-2002009	UEC-2004017	UEC-20011034
入力電圧	94V/246V	94V/246V	94V/246V
消費電力	9W	17W	34W
色温度	5000~6000K	5000~6000K	5000~6000K
口 金	G-13	G-13	RX17D
質 量	160g	290g	590g
照度 (1.5m)	80lx	160lx	270lx
期待寿命	40000h	40000h	40000h
動作温度	-20℃~50℃	-20℃~50℃	-20℃~50℃

■設計から販売まで自社対応。

■経済産業省認可取得

■証明書番号 JET6494-61010-1001

LED-Flood Light

<p>投光機</p>		<p>防犯灯</p>	
<p>ダウンライト</p>		<p>街路灯</p>	
<p>高天井 LED クレア</p>		<p>商品サンプル</p>	
<p>ビームタイプ</p>		<p>額縁型 LED 内臓 ディスプレイ</p>	
<p>スポットライト E-11</p>		<p>LED 内臓看板</p>	
<p>スポットライトスタンド品</p>		<p>RGB 箱文字看板</p>	